

SOLIS MONITORING ACCOUNT SETUP GUIDE

Using Web Browser




STEPS FOR SETTING UP MONITORING ACCOUNT-Using Web Browser

STEP 1:


- Log on to m.ginlong.com
- The following page will appear.

Switch to Professional



Login Register

E-mail/Phone Number

Password 

Login


Auto Login Next Time [Login Problem](#)

Current Version V2.1.13
Chrome58+, Firefox49+ are Recommended

STEP 2:

- Click on Register option. Make sure you enter your **EMAIL only** and **not** your phone number and set your own password.
- Enter all the details correctly.
- Once you are done, click **NEXT**.


Switch to Professional



Login **Register**

Nickname

E-mail/Phone Number

Password (At least 6 Characters) 


I have read and agreed Terms of Service

Next

Current Version V2.1.13
Chrome58+, Firefox49+ are Recommended


STEP 3:

- After clicking next, a pop up **‘Enter Verification Code’** will appear as shown.
- The verification code will be sent to your email address provided by you, above. Therefore you’ll need to check your inbox.
- You’ll receive an email (about the code) from ‘Solar Man’
- If you cannot find the email in your inbox, make sure to check your spam and junk folder as well.
- You have 1 minute to enter the verification code. If you cannot enter the verification code within one minute, you will have to resend the Verification code.
- Click Register.

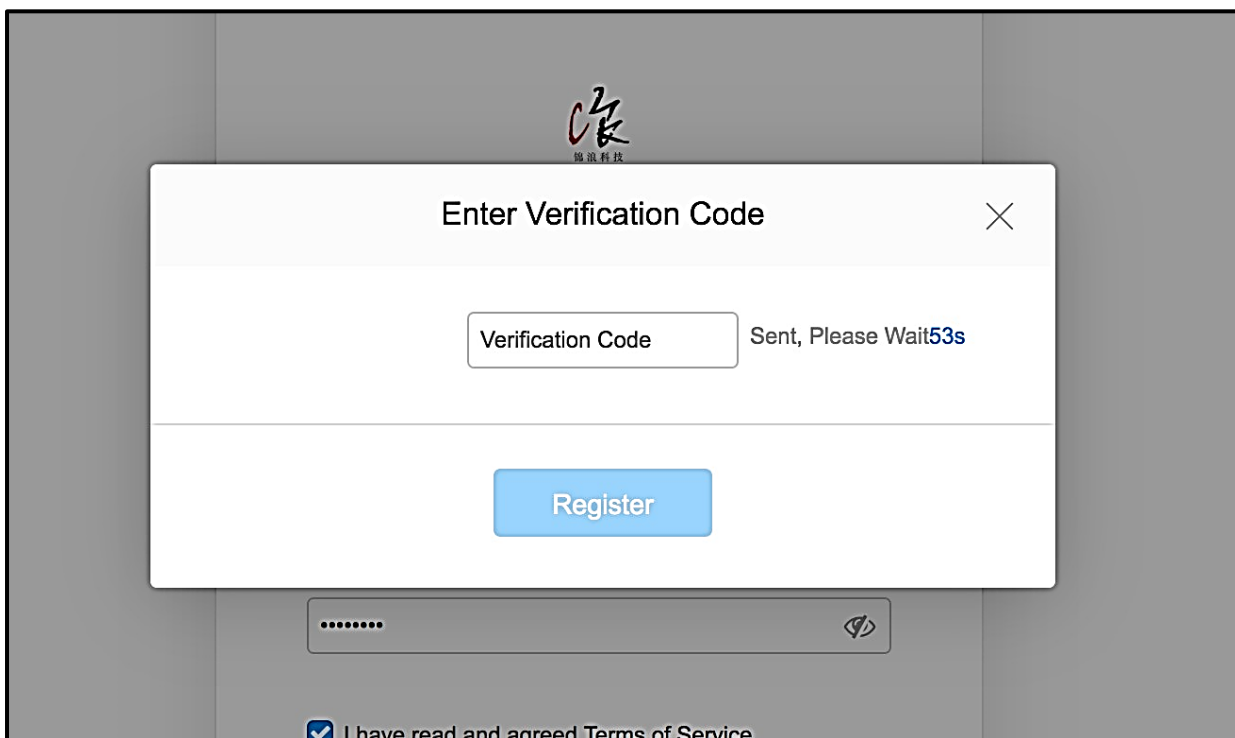

STEP 4:

- After you enter the verification code and enter register. You'll be redirected to a page as shown.
- Select create your plant in 1 minute.

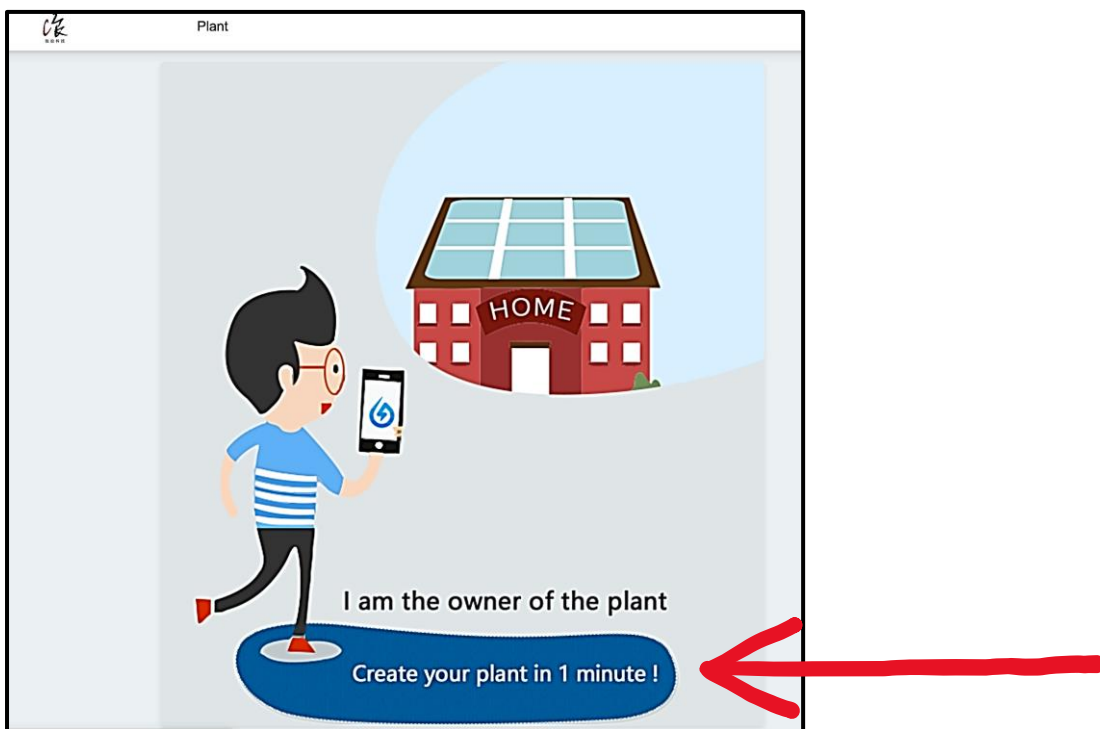

STEP 5:

- 'Confirm plant description' page will appear as shown in the next page.
- The information in this page can be filled with the help of your installer.
- If the installer is not available, you can fill this information to the best of your knowledge, as it **DOES NOT** affect the data logging capabilities or the performance of the system.

Solis Monitoring Account Setup Guide – Using Web Browser

1 Confirm Plant Description 2 Confirm Correlation Info


Plant Name → This could be any name

Plant Type
 Residential Rooftop Commercial Rooftop
 Industrial Rooftop Utility-scale Rooftop

Grid-connected Type
 Distributed All Power on Grid
 Distributed Self-use Residual Power on Grid
 Off-grid Storage System
 Utility-scale All Power on Grid

Plant Location

Enter Address for Plant Location



Address: → Put your address
Longitude 120°21'40" Latitude 31°30'23" – Nearby

Capacity (kWp)

Plant Time Zone

Azimuth (°)

Angle of Tilt (°)

Currency ← Change CNY to AUD

Benchmark Price(CNY/kWh)

Generation Province FIT(CNY/kWh) Period (yr)

Generation City FIT(CNY/kWh) Period (yr)

Generation County FIT(CNY/kWh) Period (yr)

Constructing Cost(CNY)

Constructing FIT(CNY)

Constructing FIT(CNY)

Loan Proportion (%)

Annual Loan Rate (%) Period (yr)

Refund Method
 Fixed Basis Mortgage
 Fixed Payment Mortgage

Contact Number

NOTE: The information entered here can be edited anytime.

Change CNY to AUD

STEP 6:

- Click **Next** once you have filled the required fields above.
- After clicking next, you will be redirected to the next page '**Confirm Correlation Info**' as shown.
- Click **Construction Completed**.



1 Confirm Plant Description


2 Confirm Correlation Info

Founder dk(Owner)

Back Construction Completed

STEP 7:

- The following page '**Add new device**' will appear.
- Enter the Serial Number (S/N) written on your Wi-Fi stick and click **Add**.
- Make sure you **don't** change your Device type and Brand.

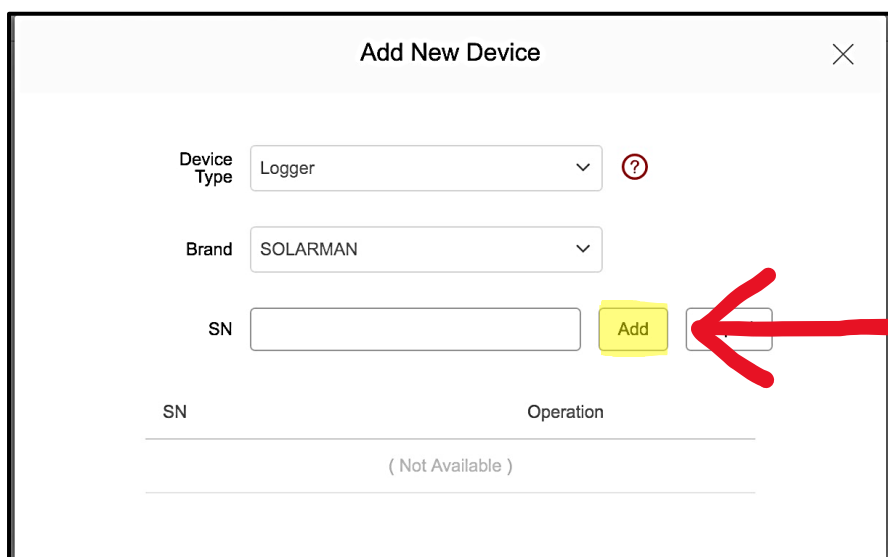

Add New Device

Device Type: Logger

Brand: SOLARMAN


SN: [Empty]

Add

SN	Operation
(Not Available)	

STEP 8:

- If the above step (Add new device) doesn't appear, you'll be redirected to the following page.
- Select **Add New Device** and Follow Step 7.

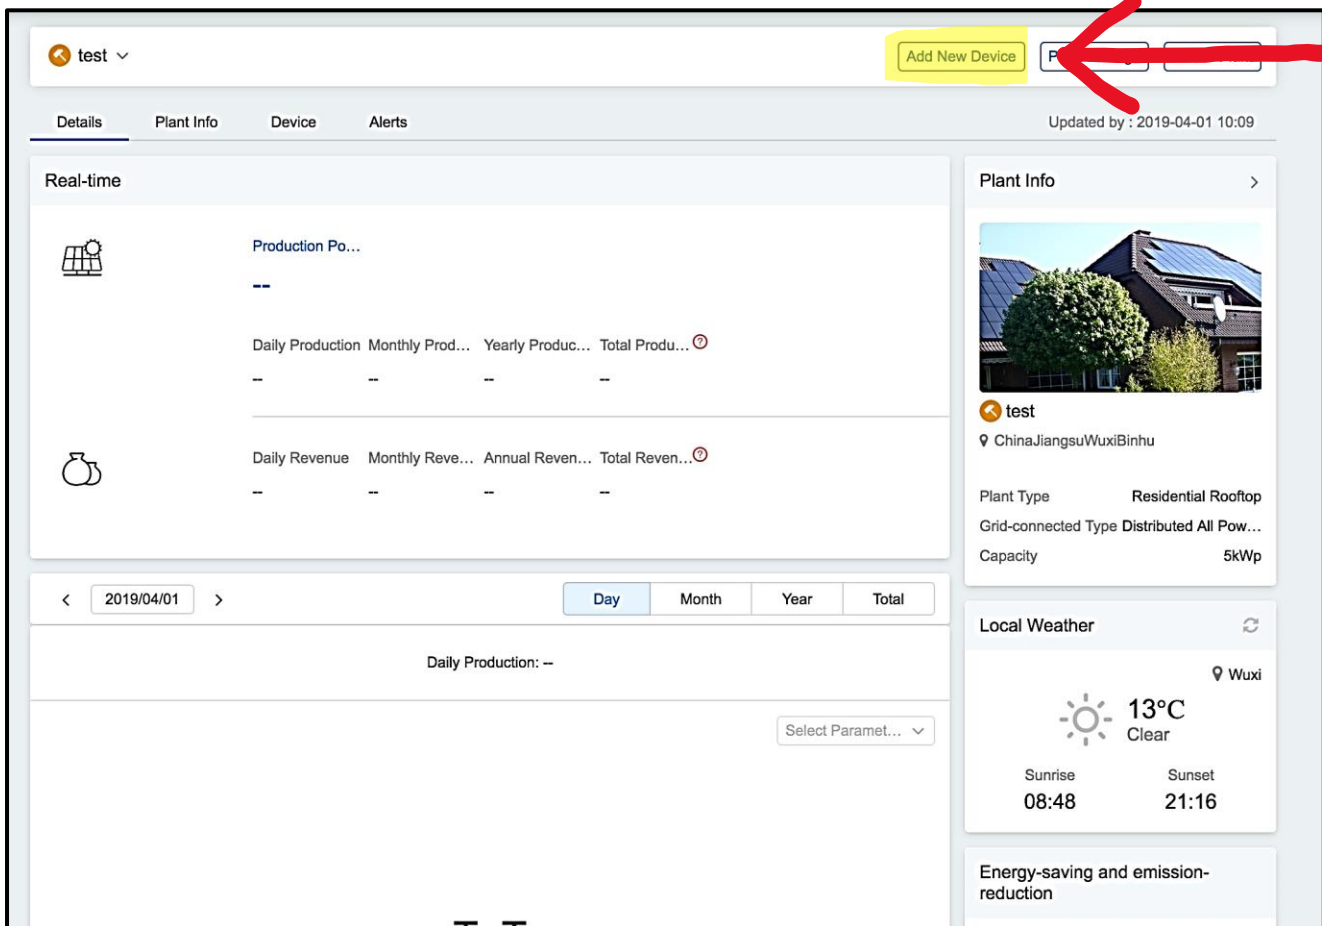

The screenshot displays the Solis Monitoring web interface. At the top right, the 'Add New Device' button is highlighted in yellow, and a red arrow points to it. The interface includes a navigation bar with 'Details', 'Plant Info', 'Device', and 'Alerts' tabs. The main content area is divided into 'Real-time' and 'Plant Info' sections. The 'Real-time' section shows production and revenue data for a specific date (2019/04/01). The 'Plant Info' section provides details about the plant, including its type, location, and capacity. A 'Local Weather' section is also visible, showing the current temperature and weather conditions for Wuxi.

test

Add New Device

Updated by : 2019-04-01 10:09

Details Plant Info Device Alerts

Real-time

Production Po... --

Daily Production	Monthly Prod...	Yearly Produc...	Total Produ...
--	--	--	--

Daily Revenue	Monthly Reve...	Annual Reven...	Total Reven...
--	--	--	--

2019/04/01

Day Month Year Total

Daily Production: --

Select Paramet... ▾

Plant Info

test

ChinaJiangsuWuxiBinhu

Plant Type Residential Rooftop

Grid-connected Type Distributed All Pow...

Capacity 5kWp

Local Weather

Wuxi


13°C Clear



Sunrise 08:48 Sunset 21:16

Energy-saving and emission-reduction

STEP 9:

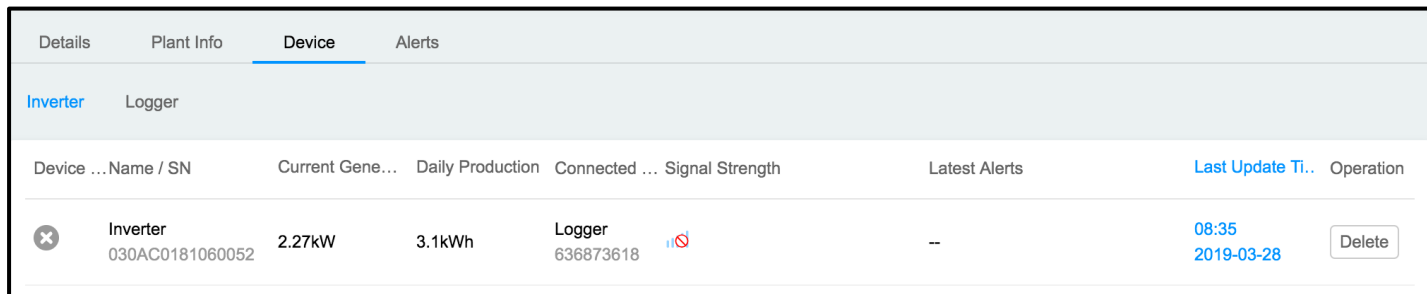
- After you've added the device, you will be redirected to the following page.





Details		Plant Info		Device		Alerts	
Inverter		Logger					
Device ...Name / SN	Current Gene...	Daily Production	Connected ...	Signal Strength	Latest Alerts	Last Update Ti..	Operation
 Inverter 030AC0181060052	2.27kW	3.1kWh	Logger 636873618		--	08:35 2019-03-28	Delete

NOTE:

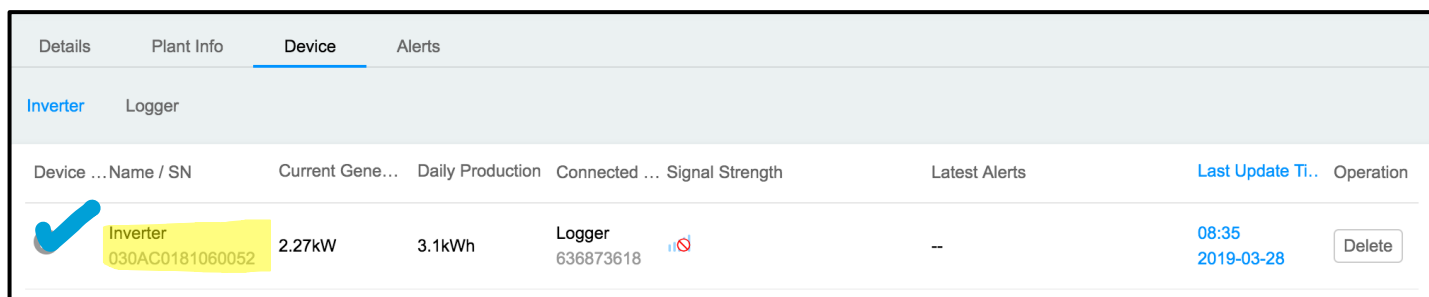- If you see the serial number of your inverter in the highlighted part and a blue tick, your initial setup is **completed** and everything should work after 20 minutes.




Details		Plant Info		Device		Alerts	
Inverter		Logger					
Device ...Name / SN	Current Gene...	Daily Production	Connected ...	Signal Strength	Latest Alerts	Last Update Ti..	Operation
 Inverter 030AC0181060052	2.27kW	3.1kWh	Logger 636873618		--	08:35 2019-03-28	Delete

- If you don't see the a blue tick or the serial number of your inverter after 5 minutes,
 1. Unplug the Wi-Fi dongle from the inverter*** (See next page to know how to unplug the Wi-Fi dongle)
 2. And then plug it back again.

***Unplugging the Wi-Fi dongle:


- The dongle is a delicate device. Be GENTLE.
- Only Twist the black screw cap clockwise (**Do NOT** pull/turn the whole silver part of the dongle)

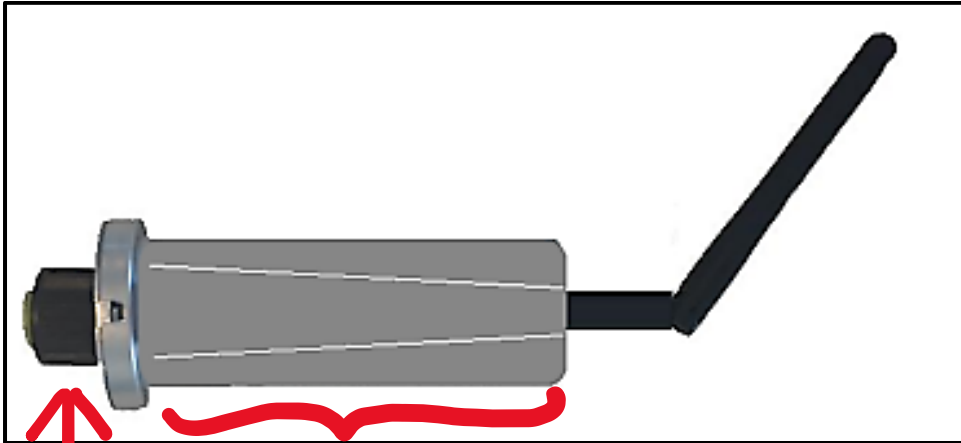


Twist this
Clockwise

Do Not touch this part of the
dongle as it might break.

3. After you've plugged the Wi-Fi dongle back again, On the Solis inverter press **Enter**.

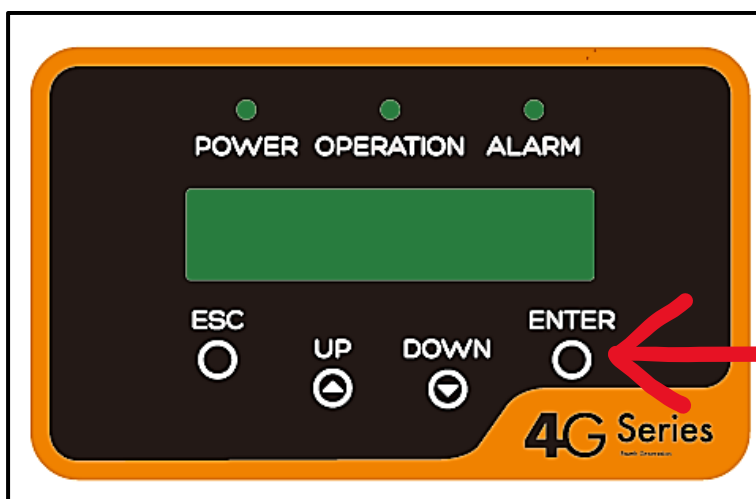

4. You'll see four options on the inverter. Select the second option i.e. **Settings** and press **Enter**.
5. The settings menu will again have two options: Set Time and Set Address. Select **Set Address**.
6. The default address number of the Solis inverter is **01**. Check if it is 01 as shown, if not, press UP/DOWN keys to set the address.



YES=<ENT> NO=<ESC>
Set Address: 01

7. Press **Enter** to save the settings.
- After this refer to Step 9.